
### Motorised Curtain Pole System

# Silent Gliss® 6150M Metropole 50mm

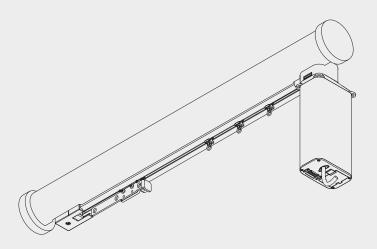


#### **Product Information**

- Electrically operated system for domestic and contract applications
- Choice of 6 different finishes black, white, steel grey, antique bronze, taupe and silver
- Accessorised with matching end caps or finials
- Easy fitting to wall and ceiling
- Maximum curtain weight dependant on motorised system selection
- Suitable for use with Wave Standard curtain heading system
- Max pole length 5m/10m dependant on motorised system selection
- Available with 2 motor options with various operating methods


#### **Profile Information**

#### Metropole Fascia Profile






#### System 5600 Profile





#### System 5100 Autoglide Profile





#### Specification Guide - download from www.silentgliss.co.uk (password required)


Silent Gliss 6150M curtain track, electrically operated, aluminium, assembled complete with gliders 6098/6143 and 2 endcovers 0350. Face fix with bracket 0537/ 3134/2-36/2/ 0334/ top fix with bracket 6138P2/ 0335 each screwed to timber/plugged and screwed to block-work/concrete at 1000mm centres. Finished in white, black, steel grey, antique bronze, taupe and silver. Refer to table for motor colour see Motor Options in this catalogue.

#### How To Measure




6150M

#### **Profile Cross Section**





6150 with System 5100 Autoglide




6150 with System 5600 Autoglide



A: System Width - EXCLUDES finials (for finial width see Design Options in this catalogue)

#### Stack Size Calculation Wave Standard

# Ja v



- $a = Stack \ depth$
- b = Stack size
- c = Min. distance

#### Wave standard

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
6	10	2.1	10	23 per metre of track + endpiece	8
6	12	2.3	12	23 per metre of track + endpiece	9
8	14	2.1	14	18 per metre of track + endpiece	10
8	16	2.3	16	18 per metre of track + endpiece	11

#### Wave standard with roller gliders

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
8	14	2.1	14	21 per metre of track + endpiece	10
8	16	2.3	16	21 per metre of track + endpiece	11

(dimensions in cm)

Note: Minimum distance (c) includes a standard 3cm clearance (front and back).

All weight calculations are based on underslung curtains. Headings above the glider channel are not recommended.

## 0-

6150M

#### **System Dimensions**

#### Maximum Curtain Weight Chart

Application with Rollers

5100	3 m	5 m
<del>-</del> ►	20	25
	20	25

Application with Rollers and Wave Rollers

5600	2 m	4 m	6 m
<del></del>	25	45	45
<del></del>	25	45	45

Note: Maximum recommended curtain weight for Wave curtain heading system is 2.5kg per metre unless using optional wave roller gliders


#### **Design Options**

#### **Endcaps**



**Finials** 



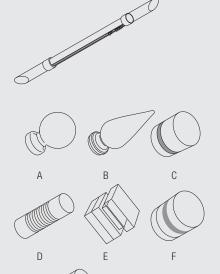

Finials are decorative elements that fit on at the end of the pole.

A: 0717 Ball End 125mm

B: 0718 Real Wood Spear 150mm

C: 0697 Strata 65mm

D: 0630 Groove Cylinder 125mm

E: 0898 Crystal Cube 55mm

F: 0899 Crystal Cylinder 55mm

G: 0315 Fused Barrel 121mm (walnut/oak/matched)


H: 0327 Fused Ball 81mm (walnut/oak/matched)

I: 0333 Glass Ball (clear/frosted) 70mm



G

Wave Standard curtain heading system




Wave is an exciting contemporary curtain heading system which allows curtains to hang in a continuous wave which is smooth, simple and elegant.

When using the Wave curtain heading system please note the maximum recommended curtain weight is 2.5kg/m. A greater weight may be achieved using wave roller glider 6098W (refer to System Dimensions).

Wave is available on System 6150 when using both System 5100 Autoglide and System 5600.

#### Wave parts - when using System 5100 Autoglide

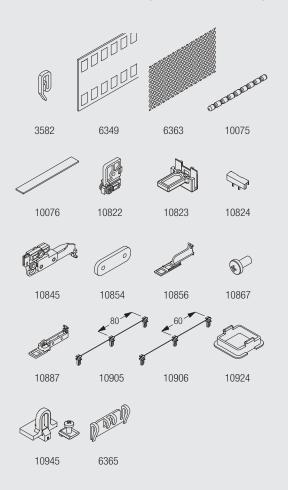

10822 Master carrier set

10823 Belt connector arm

10824 Belt connector pin

10845 Wave master carrier, single stack

10854 Wave overlap arm support

10856 Wave end stop, belt return

10867 Panhead screw

10887 Wave overlap arm set

10905 Wave glider cord (80mm)

10906 Wave glider cord (60mm)

10924 Wave glider support

10945 End stop

The following parts are supplied as standard when Silent Gliss curtains are supplied with the system. If only the track is supplied these are available at an extra cost:

6349 Curtain tape 3582 Hook

6363 Iron tape


10075 Lead weight 50gr/m

10076 Fabric weight

Single stack 60mm Wave is not recommended. Wave 80mm requires bracket 3136 minimum.



#### Wave - using System 5600

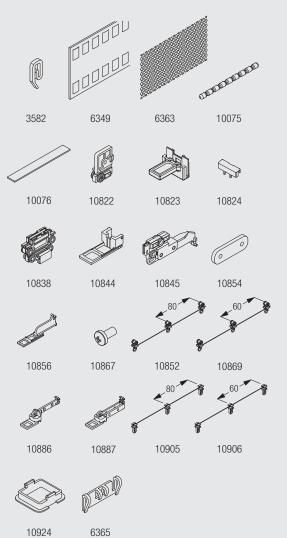

10822 Master carrier set

10823 Belt connector arm

10824 Belt connector pin

10838 Pilot runner set

10844 Motor end stop

10845 Wave master carrier, single stack 80mm

10852 Wave roller cord (80mm)

10854 Wave overlap arm support

10856 Wave end stop, belt return

10867 Panhead screw

10869 Wave roller cord (60mm)

10886 Wave overlap arm, pilot runner

10887 Wave overlap arm set

10905 Wave glider cord (80 mm)

10906 Wave glider cord (60 mm)

10924 Wave glider support

The following parts are supplied as standard when Silent Gliss curtains are supplied with the system. For hardware only orders these are available at extra cost:

10075 Lead weight 50gr/m

10076 Fabric weight

3582 Hook

6349 Curtain tape

6363 Iron tape

Note: Single stack 60mm Wave not recommended.




#### **Fitting Information**

#### Bracket Positioning using Maxi Bracket 0334 (standard)



#### Fitting of track to bracket

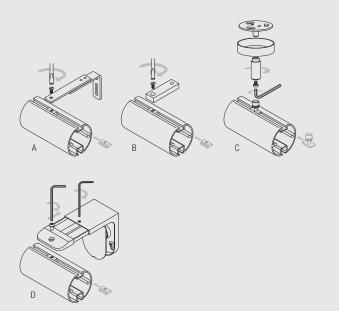



- A: Using adjustable bracket 0537
- B: Using ceiling fix bracket 6138p
- C: Using top fix bracket 0335
- D: Using maxi adjustable bracket 0334

All 50mm Metropole are supplied with Maxi bracket 0334 as standard unless otherwise specified.

#### **Fitting Options**


#### Wall fix with adustable brackets 0537

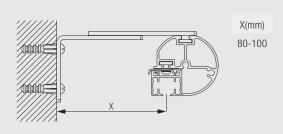



## 6150M


#### Ceiling fix with bracket 6138p2





The distance 'x' will depend on the curtain style and any other obstacles. For Wave XL 'x' should be a minimum of 22cm in order for the fabric not to touch the wall.

#### Ceiling fix using top fix bracket 0335




	X (mm)
0335	50





The distance 'x' will depend on the curtain style and any other obstacles. For Wave XL 'x' should be a minimum of 22cm in order for the fabric not to touch the wall.

#### Wall fix with 3134/2 - 3136/2




	mm
3134/2	52
3135/2	72
3136/2	92





#### Wall fix with maxi adjustable bracket 0334



	X (mm)	Y (mm)
0334	80	100





#### **Standard Accessories**

#### Parts



#### **Optional Accessories**

#### **Parts**

6138P2 (9mm)	Ceiling support set	0315	Fused barrel (50mm)	
0327	Fused ball (50mm)	0333	Glass ball (50mm)	
0335	Top fix bracket	0537	Adjustable bracket	
0630	Groove Cylinder (50mm)	0697	Strata (50mm)	
0714	Stud End cap (50mm)	0717	Ball end finial (50mm pole)	
0718	Spear finial (50mm pole)	0898	Crystal Square (50mm)	
0899	Crystal Cylinder (50mm)	6007	Endstop	
6283	Roller glider	10926	Clamp	
3134/2	Pole extension bracket (60mm - all colours)	3135/2	Pole extension bracket (80mm - all colours)	
3136/2	Pole extension bracket (100mm - all colours)			

#### **Wave Accessories**

The Wave parts listed below may apply to one or both Systems 5100 and 5600. Some parts are used on both, some are used on one or other of the systems.

0

6150M

3582	Hook		6007	Endstop	
6349	Wave curtain heading tape	REBERE	6363	Top hemming tape	
10075	Lead weight 50 gr/m	OME DE LA COMPANION DE LA COMP	10076	Fabric weight	
10822	Master carrier set		10823	Belt connector arm	
10824	Belt connector pin		10838	Pilot runner set	


10844	Wave end stop, motor	10845	Wave master carrier, single stack 80mm	1000
10852	Wave roller cord (80mm), 6.5mm channel	10854	Wave overlap support arm	0
10856	Wave end stop, belt return	10867	Panhead screw M4x16	
10869	Wave roller cord (60mm), 6.5mm channel	10886	Wave overlap arm, pilot runner set	
10887	Wave overlap arm set	10905	Wave glider cord (80mm), 6.5mm channel	*
10906	Wave glider cord (60mm), 6.5mm channel	10924	Wave glider support	

#### **Motor Options**

#### **Motor Colours**

The motors are hidden behind the curtain, however, visible motor parts (the small top section), is colour matched to the profile.

Option 1: System 5100 Autoglide with motor 5190

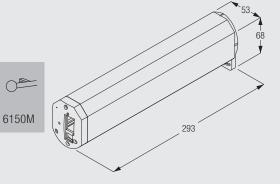

Torque: 1.0NmSpeed: 130rpmSpeed: 15cm/S

Voltage: 100 - 240 V AC 50/60 Hz


Power: 72WSafety class: IP20

Noise level: < 45 dBA (30cm)</li>Thermal overload protection

Temperature for operation: 0°C to + 60°C
Frequency receiver of Motor: 433.92 MHz

The motor 5190 is supplied with a 5m power cable with a 3 pin plug.

Option 2: System 5600 using Motor 9060 (100-250V AC & 24V DC)



Voltage: 100-250V AC
Frequency: 50-60Hz
Current: 1.3/0.45A
Speed: 160/120rpm

• Noise level: <36 dBA

Thermal overload protection

• ETL/UL, CE/IECEE Standard

• Weight: 1.4kg

Important: For Radio Control system 0450 order module 9063, Radio Control system 9940 order module 9063EL.

For further information on the above electric track systems please refer to the Electric Curtain Track Systems catalogue (www.silentgliss.co.uk).