


# Decorative Curtain Poles





## Hand Operated Curtain Pole System

# Silent Gliss® 6140M Metropole 50mm

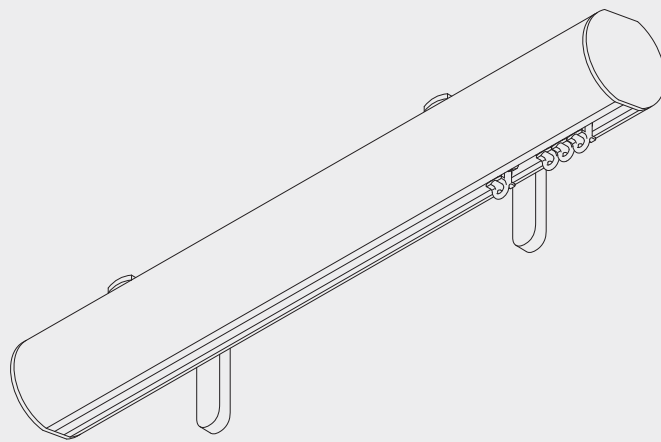


### Product Information

- Hand operated system for domestic and contract applications
- Can be bent for bay windows
- Choice of 7 different finishes - black, white, steel grey, antique bronze, taupe, silver and oak effect
- Accessorised with matching end caps and co-ordinated or matching brackets/bracket covers
- A selection of finials are available
- Easy wall or ceiling fix
- For medium to heavy curtains
- Suitable for use with Wave Standard and Wave XL curtain heading system
- Profile length 6m (oak effect 5m)



6140M

## Profile and Bending Information




  
Standard radius 500mm  
(Inc. Wave XL)

**Note:** It is important to observe the minimum bending radius for Wave XL. The system will not function with a smaller radius.

**Specification Guide - download [www.silentgliss.co.uk](http://www.silentgliss.co.uk) (password required)**

Silent Gliss 6140M curtain track, hand drawn, aluminium, assembled complete with gliders 6143 at 10/m and 2 endcovers 0350. Face fix with bracket 0537/ 3134/2-36/2/ 0334/ ceiling fix with bracket 6138P2/ 0335 each screwed to timber /plugged and screwed to block-work/concrete at 600mm centres. Finished in black, white, steel grey, antique bronze, silver, taupe and oak effect.



## How To Measure

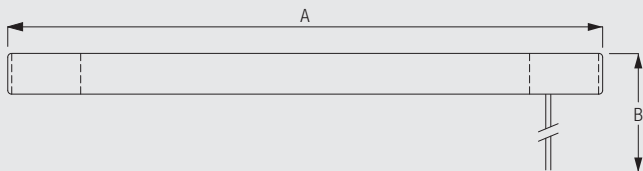

A: System Width - includes finials. See 'Design Options' for finial sizes.

## Stack Size Calculation Wave Standard

6140M



a = Stack depth  
b = Stack size  
c = Min. distance

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
6	10	2.1	10	23 per metre of track + endpiece	8
6	12	2.3	12	23 per metre of track + endpiece	9
8	14	2.1	14	18 per metre of track + endpiece	10
8	16	2.3	16	18 per metre of track + endpiece	11


### Wave standard with roller gliders

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
8	14	2.1	14	21 per metre of track + endpiece	10
8	16	2.3	16	21 per metre of track + endpiece	11




(dimensions in cm)

**Note:** Minimum distance (c) includes a standard 3cm clearance (front and back).

## Stack Size Calculation Wave XL




a = Stack depth 35cm  
b = Stack size  
c = Min. distance 22cm

System width		77-107	108-143	144-179	180-215	216-251	252-287	288-323	324-359	360-395
	b	21	26	31	36	41	46	51	56	61
System width		396-431	432-468	469-503	504-539	540-575	576-600			
	b	66	71	76	81	86	91			
System width		154-217	218-289	290-361	362-433	434-505	506-577	578-600		
	b	21	26	31	36	41	46	51		

(dimensions in cm)


## Design Options

### Endcaps

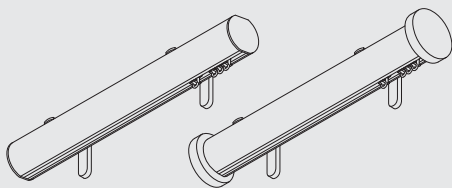


Without finials, poles are supplied as standard with flush fitting endcaps 0350 (left). Alternatively, stud endcaps 0714 (right) can be selected at no additional cost.

### Finials



Finials are decorative elements that fit on at the end of the pole.

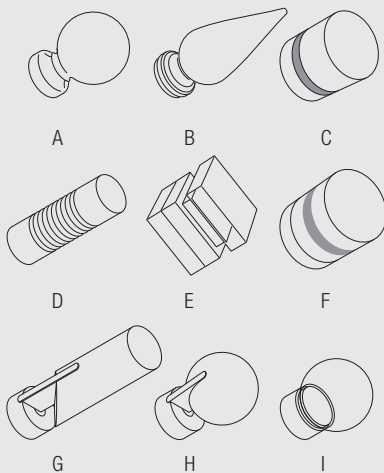


- A: 0717 Ball End 125mm
- B: 0718 Real Wood Spear 150mm
- C: 0697 Strata 65mm
- D: 0630 Groove Cylinder 125mm
- E: 0898 Crystal Cube 55mm
- F: 0899 Crystal Cylinder 55mm
- G: Fused Barrel 121mm (walnut/oak/matched)
- H: Fused Ball 84mm (walnut/oak/matched)
- I: Glass Ball (clear/frosted) 69mm




6140M

## Wave Standard curtain heading system



Wave is an exciting contemporary curtain heading system which allows curtains to hang in a continuous wave which is smooth, simple and elegant.

When using the Wave curtain heading system please note the maximum recommended curtain weight is 2.5kg/m or 10kg/m with wave roller gliders 6098W.

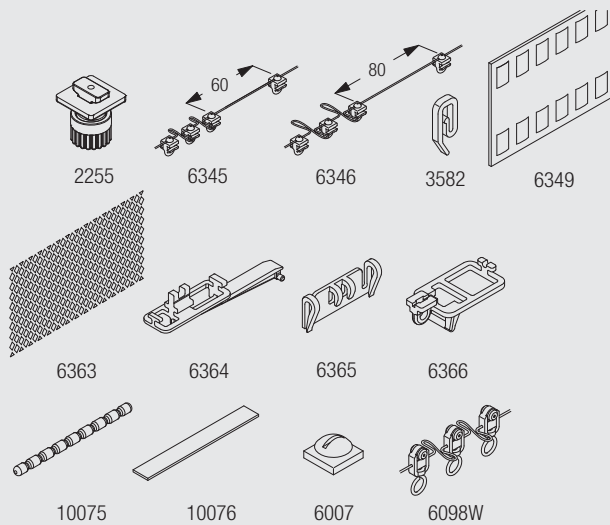

The Wave standard components are:

- 6345 Glider Cord 60mm
- 6346 Glider Cord 80mm
- 6007 End stop

The items listed below for Enhanced Wave (80mm glider cord only) are all supplied at an additional cost as per the price list.


- 2255 Adjustable brake
- 6364 Extension (for use with 6365)
- 6365 Hanger (for use with 6364)
- 6366 Carrier for draw rod

Roller gliders must be ordered separately  
6098W Wave roller glider 80mm


Optional enhanced components to improve the presentation of the curtain:

- 3582 Hook
- 6349 Curtain tape
- 6363 Iron-on top hemming tape
- 10075 Lead weight for bottom hem 50gr/m
- 10076 Fabric weight for side of curtain

### Wave XL curtain heading system



6140M

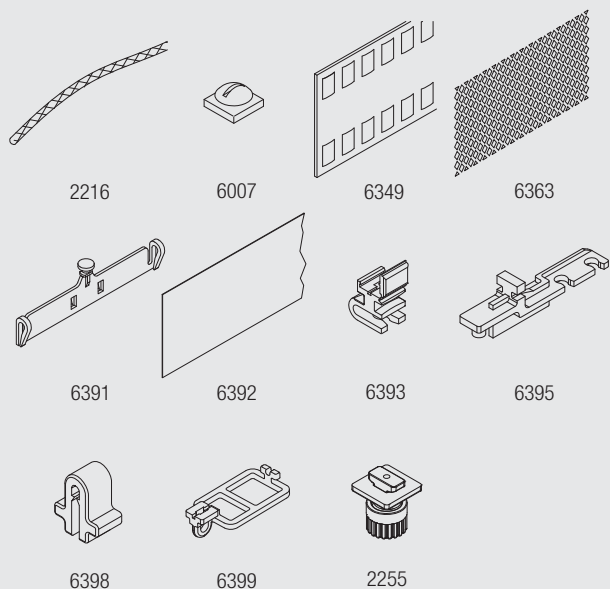

Wave XL is especially designed for high and large application areas through generously designed waves with large cross section dimensions.

The Wave XL components are:

- 2216 Cord 0.85 mm
- 2255 Adjustable brake
- 6007 End stop
- 6349 Curtain tape
- 6363 Iron tape
- 6391 Hanger
- 6392 Heading film
- 6393 Glider
- 6395 Extension
- 6399 Carrier for draw rod

Additional optional Wave components:


- 6398 Clip

## Fitting Information

### Bracket positioning when using adjustable brackets 0537




### Fitting of track to bracket

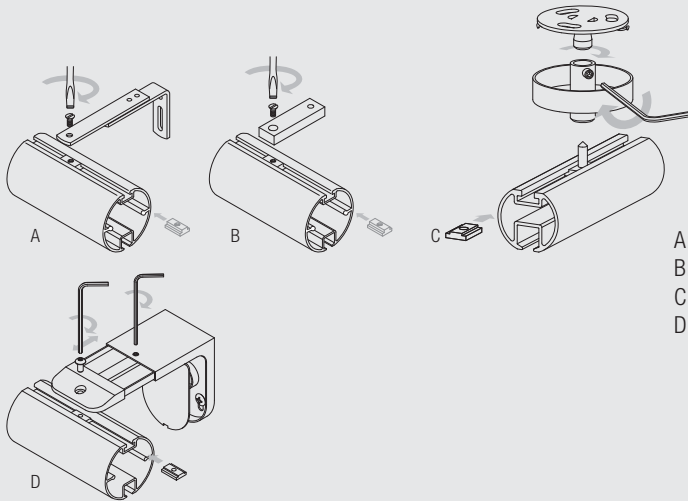


- A: Using adjustable bracket 0537
- B: Using ceiling fix bracket 6138p
- C: Using top fix bracket 0335
- D: Using maxi adjustable bracket 0334

## Fitting Options


### Wall fix with adjustable brackets 0537

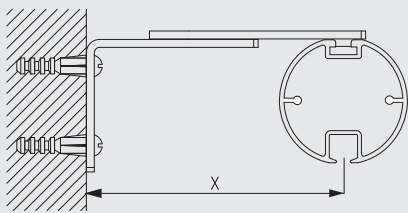

	X (mm)
0537	80-100




0537  
Adjustable bracket




6141  
Track insert (uses screw 0798)

Note: all bent metropole systems are supplied with adjustable bracket 0537 as standard.


### Wall fix with brackets 3134/2-3136/2



	X (mm)
3134/2	52
3135/2	72
3136/2	92




3134/b  
Midial ceiling fix bracket




6141  
Track insert (uses screw 0798)

## Ceiling fix with 6138P2




	X (mm)
6138P2	80




6138P2 (9mm)  
Ceiling support set

Min. distance from wall when using Wave XL: 220mm.


## Ceiling fix with top fix bracket 0335



X (mm)
50




0335  
Top fix bracket




6141  
Track insert (uses  
screw 0798)


## Wall fix with maxi adjustable bracket 0334

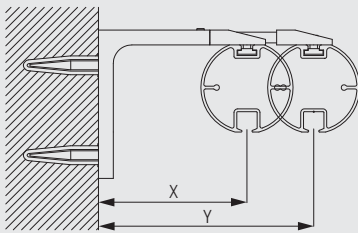

	X (mm)	Y (mm)
0334	80	100



0334  
Maxi adjustable  
bracket



6141  
Track insert (uses  
screw 0798)

6140M

## Standard Accessories



















### Parts

0350	Flush endcap (50mm)		0537	Adjustable bracket	
0700	Profile 50mm		3133	Bracket cover (60mm)	
6065	Twist eye endstop		6141	Track insert (uses screw 0798)	
6143	Glider 6144 in strip form		6784	Machine screw (for 6141 insert)	



## Optional Accessories



### Parts

6138P2 (9mm)	Ceiling support set		0315	Fused barrel (50mm)	
0327	Fused ball (50mm)		0333	Glass ball (50mm)	
0334	Maxi adjustable bracket		0335	Top fix bracket	
0630	Groove Cylinder (50mm)		0697	Strata (50mm)	
0713	Midial connecting bracket		0714	Stud End cap (50mm)	
0717	Ball end finial (50mm pole)		0718	Spear finial (50mm pole)	
0898	Crystal Square (50mm)		0899	Crystal Cylinder (50mm)	
6283	Roller glider		3134/2	Pole extension bracket (60mm - all colours)	
3135/2	Pole extension bracket (80mm - all colours)		3136/2	Pole extension bracket (100mm - all colours)	



6140M

## Wave Accessories

2216	Cord		2255	Adjustable brake	
3582	Hook		6007	Endstop	
6345	Wave glider cord (60mm)		6346	Wave glider cord (80mm)	
6349	Curtain tape		6363	Top hemming tape	
6364	Extension		6365	Hanger	
6366	Wave carrier for draw rod		6391	Hanger	
6392	Heading film		6393	Glider	
6395	Extension		6398	Clip	
6399	Carrier for Draw rod		10075	Lead weight 50 gr/m	
10076	Fabric weight		6098W	Wave roller glider cord (80mm)	



6140M



6140M

[www.silentgliss.co.uk](http://www.silentgliss.co.uk)  
[www.silentglissglobal.com](http://www.silentglissglobal.com)

Silent Gliss Ltd  
Pyramid Business Park  
Poorhole Lane  
Broadstairs  
Kent  
CT10 2PT  
Great Britain

Tel: +44 (0) 1843 863571  
Fax: +44 (0) 1843 864503  
[info@silentgliss.co.uk](mailto:info@silentgliss.co.uk)

Silent Gliss Global Ltd  
Pyramid Business Park  
Poorhole Lane  
Broadstairs  
Kent  
CT10 2PT  
Great Britain

Tel: +44 (0) 1843 874250  
Fax: +44 (0) 1843 874457  
[info@silentglissglobal.com](mailto:info@silentglissglobal.com)